

8500-ME-AF (5 PLY)

AGRIFIBRE CORE, ULTRA HEAVY-DUTY, ANTI-WARPING CONSTRUCTION FOR INTENSIVE USE

- ❶ **STILES:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC), including a 7/8" (22 mm) piece of hardwood, matched with faces, for a total width of 4 3/16" (107 mm).
- ❷ **TOP AND BOTTOM RAILS:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC) or laminated strand lumber (LSL), for a total width of 3 5/16" (85 mm).
- ❸ **CORE:** Agrifibre (NAUF). **Neutral FSC.**
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR USE

WARRANTY: LIFETIME

OPTIONS

- | 20 minute fire rating, specify 8520-ME-AF.
- | Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).
- | Autonomy door available, specify 8513-ME-AF.
- | * M.R. 5.1/5.2 according to project localisation. Contact us.
- | ** To get M.R. 7.0, specify FSC faces.
- | *** To get I.E.Q. 4.4, specify NAUF or NAUF/FSC faces.

NOTES

- | Specify when M.R. 6.0 is required.
- | Dimensions are nominal before trimming.




Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-04
and CSA 0132.2 90



LEED ELIGIBLE CREDITS	M.R.						I.E.Q. 4.4 (NAUF)
	4.1	4.2	5.1	5.2	6.0	7.0	
✓	✓	*	*	✓	**	***	

❶ STILES ME

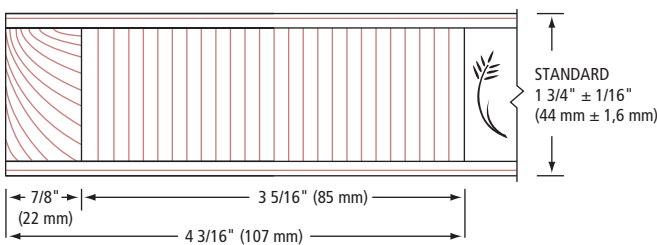

❷ RAILS

