

6000-ME (5 PLY)

LSL CORE FOR INTENSIVE USE

- ❶ **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ❷ **TOP AND BOTTOM RAILS:** Integrated.
- ❸ **CORE:** Laminated strand lumber (LSL). Complies with ANSI 1.5.4 (NAUF).
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR USE

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating, specify 6020-ME.

| Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).


| Also available: 7/8" (22 mm) rails for SCLC-5/SCLC-7 (AWI/AWMAC) compliance.

| ** To get a M.R. 7.0 contribution, specify FSC faces and stiles.

| *** To get I.E.Q. 4.4, specify NAUF or NAUF/FSC faces.

NOTE


| Dimensions are nominal before trimming.

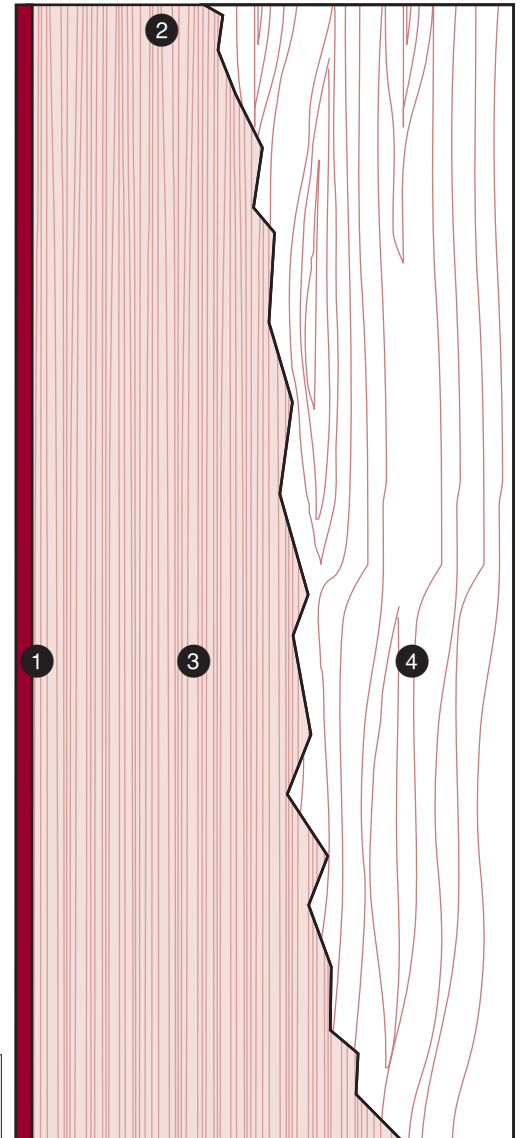

LEED ELIGIBLE CREDITS	M.R.		I.E.Q.				
	4.1	4.2	5.1	5.2	6.0	7.0	4.4 (NAUF)
			✓	✓		**	***

Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-04
and CSA 0132.2 90

❶ STILES ME

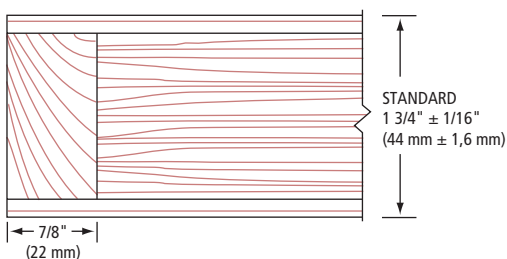

❷ INTEGRATED RAILS

