

7000-ME (5 PLY)

1 PLY LVL CORE, ANTI-WARPING, FOR INTENSIVE USE

- ① **STILES:** 7/8" (22 mm) wide hardwood, matched with faces. **Bonded to core.**
- ② **TOP AND BOTTOM RAILS:** 7/8" (22 mm) in wood or SCL, (LVL FSC) or laminated strand lumber (LSL), manufacturer's choice. **Bonded to core.**
- ③ **CORE:** 1/8" (3 mm) thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC). LVL is **FSC Certified** (NAUF).
- ④ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR USE

REFERENCE SCLC-5/SCLC-7 (AWI/AWMAC).

WARRANTY: LIFETIME

OPTIONS


- | 20 minute fire rating, specify 7020-ME.
- | Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).
- | 3 5/16" (85 mm) LVL FSC or LSL rails (according to hardware).
- | * To optimize M.R. 7.0, specify FSC faces.
- | *** To get I.E.Q. 4.4, specify NAUF or NAUF/FSC faces.

NOTE

- | Dimensions are nominal before trimming.




Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-04
and CSA 0132.2 90

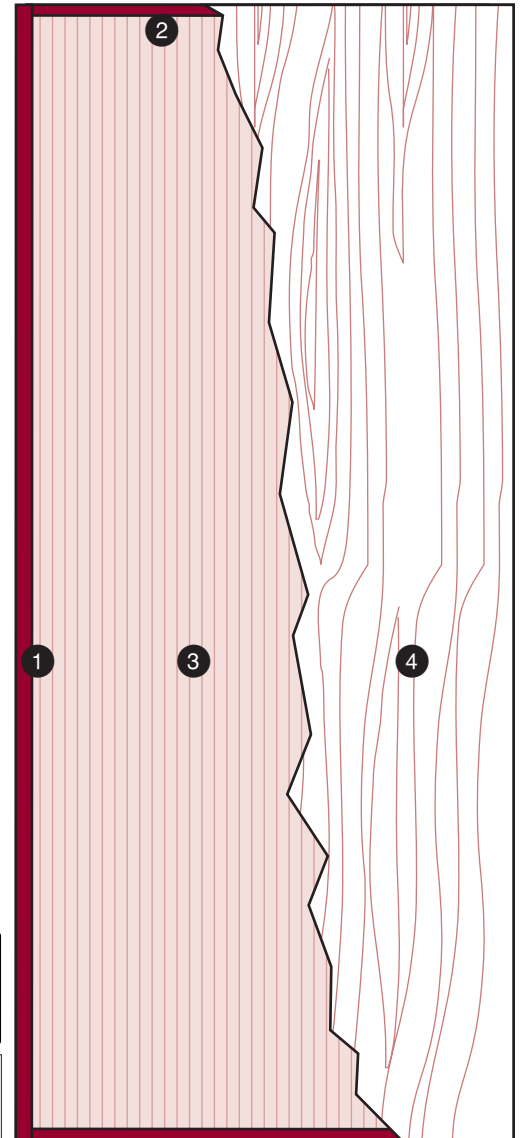

LEED ELIGIBLE CREDITS	M.R.						I.E.Q. 4.4 (NAUF)
	4.1	4.2	5.1	5.2	6.0	7.0	
	✓	✓	✓	✓		✓*	***

① STILES ME

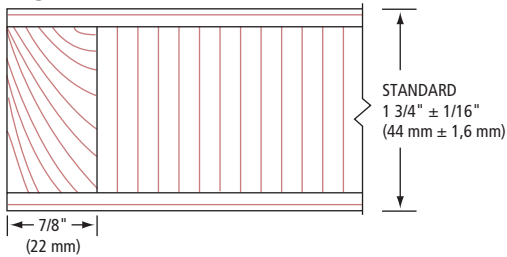

② RAILS

