

9100-MO (5 PLY)

HOLLOW CORE FOR MODERATE USE

- ❶ **STILES:** 1 3/16" (30 mm) clear, finger-jointed, low-density wood.
- ❷ **TOP AND BOTTOM RAILS:** 1 3/16" (30 mm) low-density wood or SCL, (LVL FSC) or laminated strand lumber (LSL), manufacturer's choice.
- ❸ **CORE:** 4 3/4" (120 mm) honeycomb (100% recycled).
- ❹ **FACES:** Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK: Lock materials manufacturer's choice. Low-density wood parts 4 1/4" (108 mm) wide x 20" (508 mm) long (including stile).

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR USE

WARRANTY: 3 years.

OPTIONS

| Lock block on both sides.

| Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).


| * To get M.R. 4.1/4.2, specify 2 ply faces or recycled hardboard panel.

| ** To get M.R. 7.0, specify FSC faces, stiles and rails.

| *** To get I.E.Q. 4.4, specify NAUF or NAUF/FSC faces.

NOTE


| Dimensions are nominal before trimming.

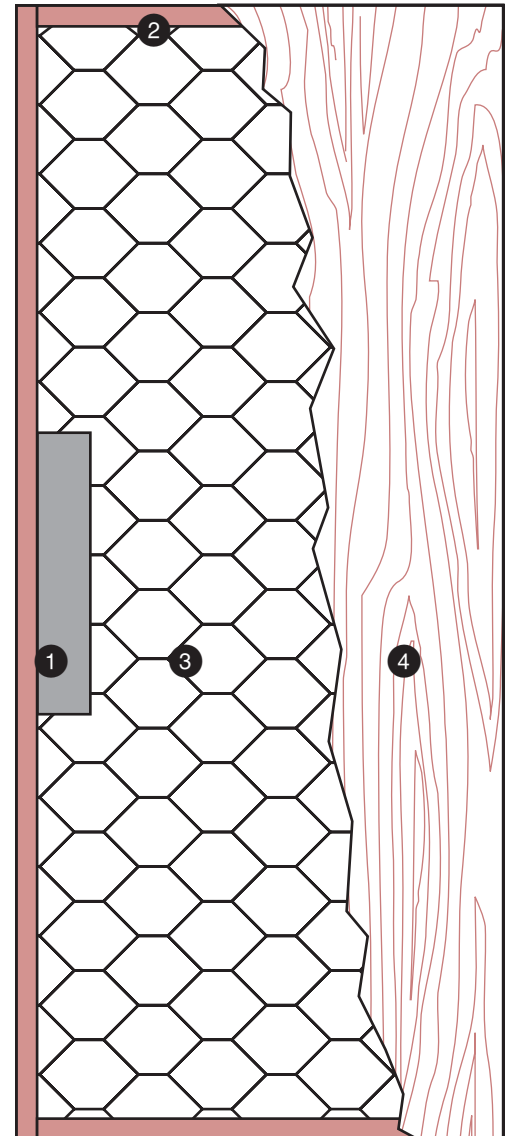

LEED ELIGIBLE CREDITS	4.1		4.2		M.R. 5.1		5.2		6.0		7.0		I.E.Q. 4.4 (NAUF)	
	*	*	✓	✓			**	**	**	**	**	**	***	***



❶ STILES MO

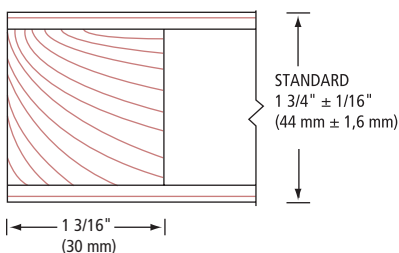

❷ RAILS

