

EVOLUTION SERIES

VENEER JAMB – RATED (45 MINUTES)

J1245A

APPLIED T-STOP JAMB (3/4")

- ❶ 1/8" (3 mm) hardwood edges
- ❷ 3/4" (19 mm) 45 min fire core
- ❸ 1/32" wood veneer faces
- ❹ 5/8" (15.8 mm) x 1 1/2" (38.1 mm) hardwood door stop (standard)
- ❺ Door
- ❻ Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 4 5/8" (117 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single: 42" (1,067 mm) x 96" (2,438 mm)

| Double: 72" (1,829 mm) x 96" (2,438 mm)

CASING: 5/8" (15 mm) x 2 1/2" (64 mm)

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)


WARRANTY: 3 years

OPTIONS

- | Other configurations upon request
- | *M.R. 5.1/5.2 according to project localisation. Contact us.
- | ** To get M.R. 7.0, specify FSC core and faces.
- | *** To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ○ Subject to evaluation. Contact us.

NOTE

- | Mounting brackets are suggested for proper installation.
- | Installation requires a wood casing of 1/4" x 1 1/2" minimum.

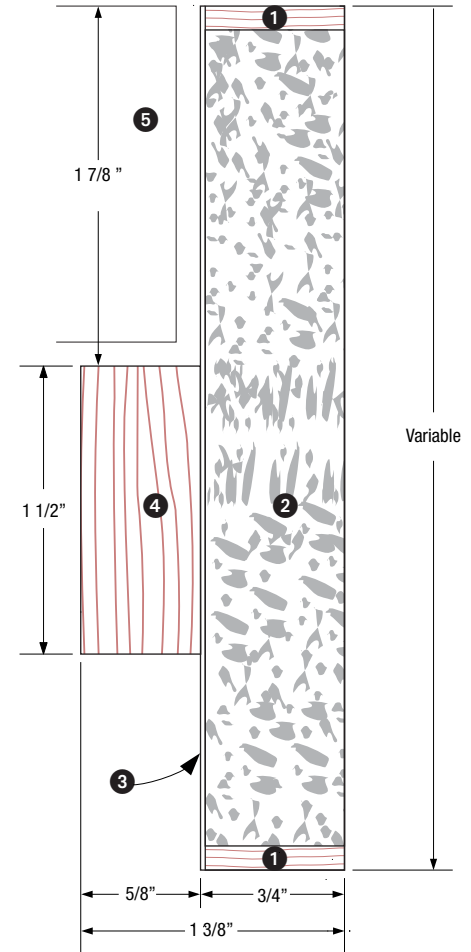

LEED Eligible Credits	MR					IEQ		ID1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
		✓	*		**	○	***	○	○



FSC* certified products available on request.

JAMB ASSEMBLY

Head and jamb

