

EVOLUTION SERIES

VENEER JAMB – RATED (60 MINUTES)

J1260B

APPLIED T-STOP JAMB (1")

- ① 1/32" wood veneer faces
- ② 1" (25.4 mm) 60 min fire core (GP core)
- ③ 1/32" wood veneer face
- ④ 5/8" (15.8 mm) x 1 1/2" (38.1 mm) hard-wood door stop (standard)
- ⑤ Door
- ⑥ Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 4 3/4" (120 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

- | Single: 48" (1,219 mm) x 108" (2,743 mm)
- | Double: 96" (2,438 mm) x 108" (2,743 mm)

CASING: 5/8" (15 mm) x 2 1/2" (64 mm)

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)


WARRANTY: 3 years

OPTIONS

- | Other configurations upon request
- | * M.R. 5.1/5.2 according to project localisation. Contact us.
- | ** To get M.R. 7.0, specify FSC core and faces.
- | *** To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ○ Subject to evaluation. Contact us.

NOTE

- | Mounting brackets are suggested for proper installation.
- | Installation requires a wood casing of 1/4" x 1 1/2" minimum.

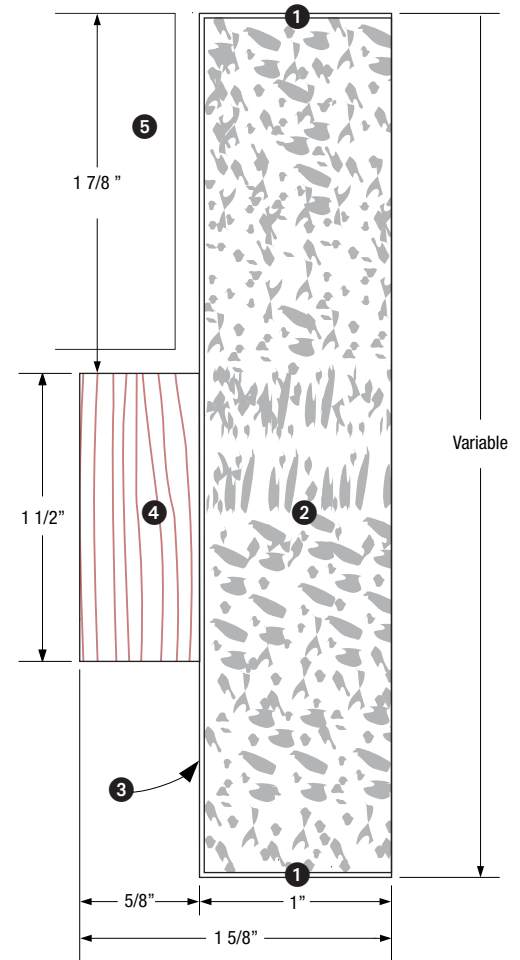

| LEED Eligible Credits | MR | | | | | IEQ | | ID1 | PR 2 |
|-----------------------------|----|---|---|---|----|-----|-----|--------|------|
| | 3 | 4 | 5 | 6 | 7 | 3.2 | 4.4 | mode 2 | |
| | | ✓ | * | | ** | ○ | *** | ○ | ○ |



FSC* certified products available on request.

JAMB ASSEMBLY

Head and jamb

