

EVOLUTION SERIES

VENEER JAMB – NON-RATED

J1300A

SINGLE RABBET JAMB (3/4")

- ❶ 1/32" wood veneer faces
- ❷ 3/4" (19 mm) plywood veneer
- ❸ Hardwood backing
- ❹ 1/32" wood veneer faces
- ❺ 5/8" (15.8 mm) plywood veneer door stop
- ❻ Door
- ❼ Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 3 5/8" (92 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single: 48" (1,219 mm) x 120" (3,048 mm)

| Double: 96" (2,438 mm) x 120" (3,048 mm)

CASING: According to your needs

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)


WARRANTY: 3 years

OPTIONS

- | Other configurations upon request
- | * M.R. 5.1/5.2 according to project localisation. Contact us.
- | *** To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ◦ Subject to evaluation. Contact us.


NOTE

- | Mounting brackets are suggested for proper installation.

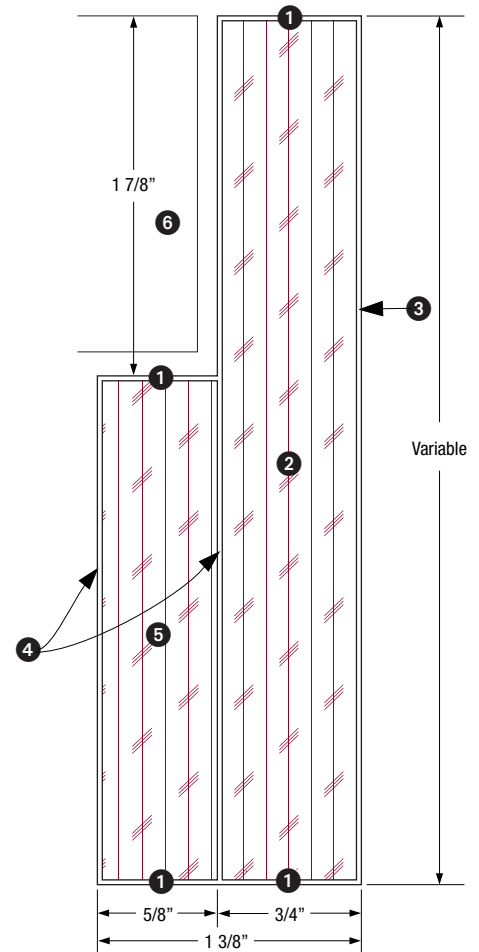

JAMB ASSEMBLY

Head and jamb

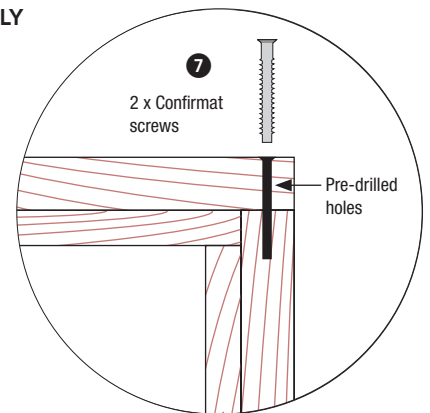

LEED Eligible Credits	MR					IEQ		ID1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
		✓	*			○	***	○	○

