

# EVOLUTION SERIES

## VENEER JAMB – RATED (20 MINUTES)

# J1320A

### SINGLE RABBET JAMB (3/4")

- ❶ 1/32" wood veneer faces
- ❷ 3/4" (19 mm) hardwood
- ❸ 5/8" (15.8 mm) hardwood door stop
- ❹ 1/32" wood veneer faces
- ❺ Door
- ❻ Corner rabbet type

#### SPECIFICATIONS

##### MINIMUM WALL THICKNESS:

3 3/4" (95 mm) up to 96" high  
4 9/16" (116 mm) from 96" to 108" high

**ASSEMBLY:** Please refer to installation instructions

##### MAXIMUM OPENING

| Single: 48" (1,219 mm) x 108" (2,743 mm)  
| Double: 96" (2,438 mm) x 108" (2,743 mm)

**CASING:** 5/8" (15 mm) x 2 1/2" (64 mm)

**SHIPPING:** Unassembled (Knock Down)

**WRAPPING:** Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

**Installation instructions and peel-and-stick door bumpers are included (mandatory)**


**WARRANTY:** 3 years

#### OPTIONS

- | Other configurations upon request
- | \* M.R. 5.1/5.2 according to project localisation. Contact us.
- | \*\*\* To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ◦ Subject to evaluation. Contact us.


#### NOTE

- | Mounting brackets are suggested for proper installation.
- | Installation requires a wood casing of 1/4" x 1 1/2" minimum.

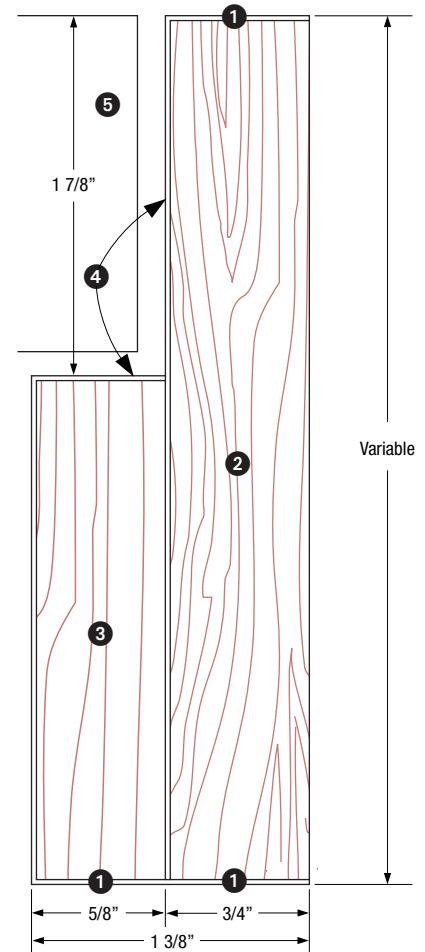

#### JAMB ASSEMBLY

Head and jamb

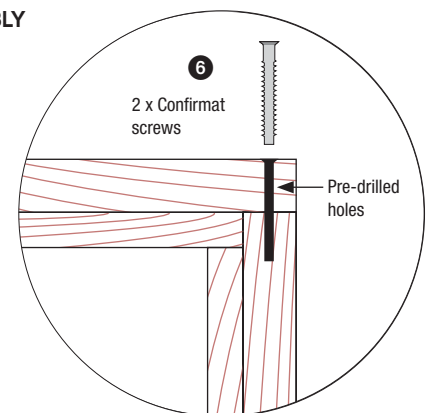

LEED Eligible Credits	MR					IEQ		ID1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
		✓	*			○	***	○	○

