

TRADITION SERIES

VENEER JAMB – NON-RATED

J2100A

FLAT JAMB (3/4")

- ① 3/4" (19 mm) hardwood
- ② Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 2 1/2" (64 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single: 48" (1,219 mm) x 120" (3,048 mm)

| Double: 96" (2,438 mm) x 120" (3,048 mm)

CASING: According to your needs

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)


WARRANTY: 3 years

OPTIONS

- | Other configurations upon request
- | Advice when silencer
- | * M.R. 5.1/5.2 according to project localisation. Contact us.
- | *** To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ○ Subject to evaluation. Contact us.


NOTE

- | Mounting brackets are suggested for proper installation.

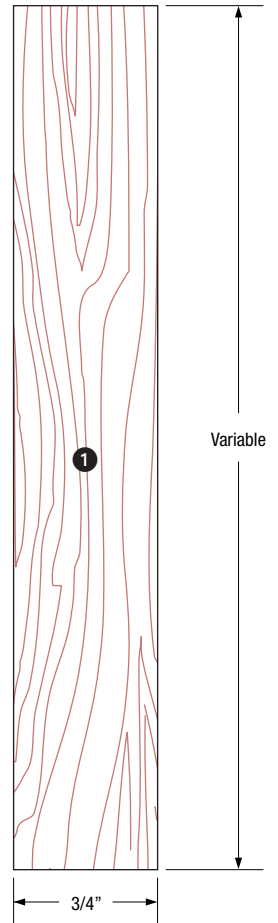

JAMB ASSEMBLY

Head and jamb

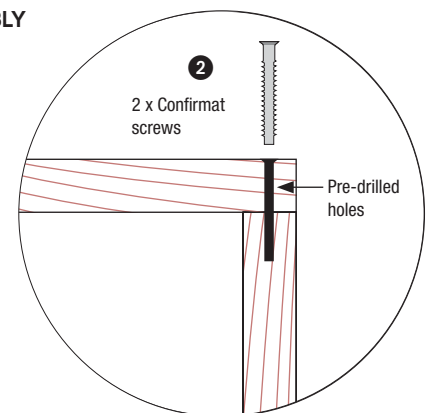

LEED Eligible Credits	MR					IEQ		ID1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
		✓	*			○	***	○	○

