TRADITION SERIES

SOLID-WOOD JAMB - NON-RATED

J2200A

APPLIED T-STOP JAMB (3/4")

- 1 Hardwood
- 2 5/8" (15.8 mm) x 1 1/2" (38.1 mm) hardwood door stop (standard)
- 3 Door
- 4 Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 3 5/8" (92 mm) MINIMUM JAMB THICKNESS: 3/4" (19 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single 48" (1,219 mm) x 120" (3,048 mm)

Double 96" (2,438 mm) x 120" (3,048 mm)

CASING: According to your needs

SHIPPING: Unassembled (Knock Down)

WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and

bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)

WARRANTY: 3 years

OPTIONS

Other configurations upon request

* M.R. 5.1/5.2 according to project localisation. Contact us.

** To get M.R. 7.0, specify a FSC certified species.


*** To get IEQ 4.4, specify NAUF jamb.

| Mounting brackets available

Pre-machining

Pre-finishing

| • Subject to evaluation. Contact us.

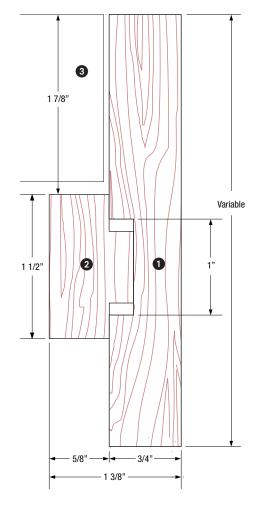

LEED	MR					IEQ		ID1	PR 2
Eligible	3	4	5	6	7	3.2	4.4	mode 2	
Credits			*		**		***	0	0









FSC* certified products available on request.

