

# TRADITION SERIES

## SOLID-WOOD JAMB – RATED (20 MINUTES)

# J2220A

### APPLIED T-STOP JAMB (3/4")

- ① Hardwood
- ② Hardwood door stop
- ③ Door
- ④ Corner rabbet type

#### SPECIFICATIONS

##### MINIMUM WALL THICKNESS:

3 3/4" (95 mm) up to 96" high  
4 9/16" (116 mm) from 96" to 108" high

**MINIMUM JAMB THICKNESS:** 3/4" (19 mm)

**ASSEMBLY:** Please refer to installation instructions

##### MAXIMUM OPENING

| Single 48" (1,219 mm) x 108" (2,743 mm)  
| Double 96" (2,438 mm) x 108" (2,743 mm)

**CASING:** 5/8" (15 mm) x 2 1/2" (64 mm)

**SHIPPING:** Unassembled (Knock Down)

**WRAPPING:** Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

**Installation instructions and peel-and-stick door bumpers are included (mandatory)**


**WARRANTY:** 3 years

#### OPTIONS

- | Other configurations upon request
- | \* M.R. 5.1/5.2 according to project localisation. Contact us.
- | \*\* To get M.R. 7.0, specify a FSC certified species.
- | \*\*\* To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ○ Subject to evaluation. Contact us.

#### NOTE

- | Mounting brackets are suggested for proper installation.
- | Installation requires a wood casing of 1/4" x 1 1/2" minimum.

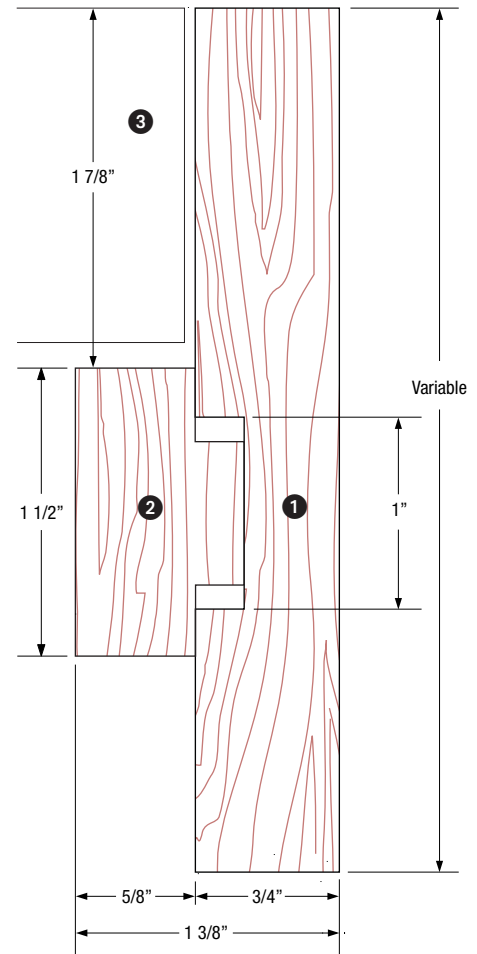

LEED Eligible Credits	MR					IEQ		ID 1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
			*		**	○	***	○	○



FSC\* certified products available on request.

#### JAMB ASSEMBLY

Head and jamb

