

TRADITION SERIES

SOLID-WOOD JAMB – NON-RATED

J2400A

DOUBLE RABBET JAMB (3/4")

- ① 3/4" (19 mm) hardwood
- ② 5/8" (15.8 mm) hardwood door stop
- ③ Doors
- ④ Corner rabbet type

SPECIFICATIONS

MINIMUM WALL THICKNESS: 4 5/8" (117 mm)

MINIMUM JAMB THICKNESS: 1 3/8" (35 mm)

ASSEMBLY: Please refer to installation instructions

MAXIMUM OPENING

| Single: 48" (1,219 mm) x 120" (3,048 mm)

| Double: 96" (2,438 mm) x 120" (3,048 mm)

CASING: According to your needs

SHIPPING: Unassembled (Knock Down)


WRAPPING: Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

Installation instructions and peel-and-stick door bumpers are included (mandatory)

WARRANTY: 3 years


OPTIONS

- | Other configurations upon request and availability
- | * M.R. 5.1/5.2 according to project localisation. Contact us.
- | ** To get M.R. 7.0, specify a FSC certified species.
- | *** To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ○ Subject to evaluation. Contact us.

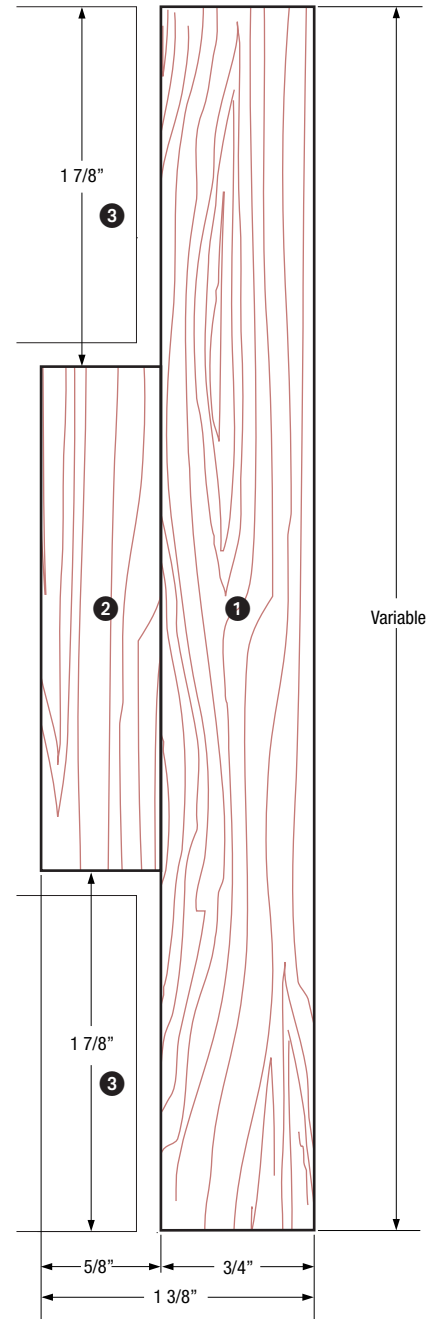

JAMB ASSEMBLY

Head and jamb



LEED Eligible Credits	MR					IEQ		ID 1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
			*		**	○	***	○	○



FSC* certified products available on request.