

# TRADITION SERIES

## SOLID-WOOD JAMB – NON-RATED

### J2600A

### SINGLE INTEGRATED CASING JAMB (3/4")

- ① 3/4" (19 mm) hardwood
- ② 5/8" (15.8 mm) hardwood door stop
- ③ Door
- ④ Casing

#### SPECIFICATIONS

**MINIMUM WALL THICKNESS:** According to your needs

**ASSEMBLY:** Please refer to installation instructions

#### MAXIMUM OPENING

| Single: 48" (1,219 mm) x 120" (3,048 mm)

| Double: 96" (2,438 mm) x 120" (3,048 mm)

**CASING:** According to your needs

**SHIPPING:** Unassembled (Knock Down)


**WRAPPING:** Each frame will be shipped in a cardboard box, with 1/32" (1 mm) foam and bundle wrapped.

**Installation instructions and peel-and-stick door bumpers are included (mandatory)**


**WARRANTY: 3 years**

#### OPTIONS

- | Other configurations upon request and availability
- | \* M.R. 5.1/5.2 according to project localisation. Contact us.
- | \*\* To get M.R. 7.0, specify a FSC certified species.
- | \*\*\* To get IEQ 4.4, specify NAUF jamb.
- | Mounting brackets available
- | Pre-machining
- | Pre-finishing
- | ◯ Subject to evaluation. Contact us.

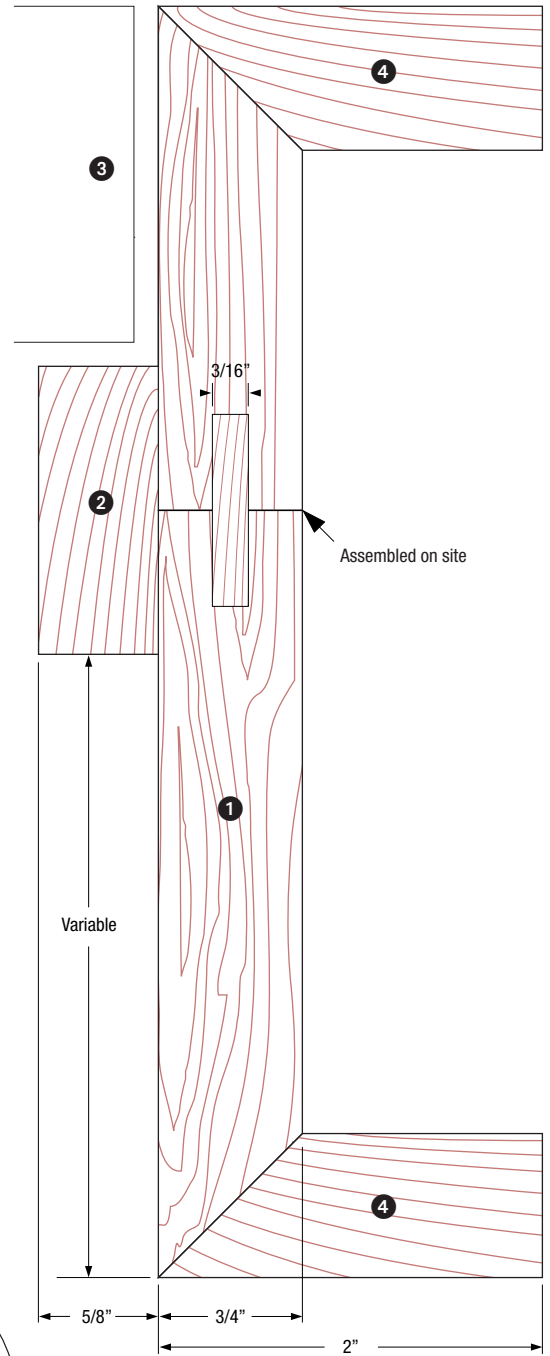

LEED Eligible Credits	MR					IEQ		ID 1	PR 2
	3	4	5	6	7	3.2	4.4	mode 2	
			*		**	○	***	○	○



**JAMB ASSEMBLY**  
Head and jamb

FSC® certified products available on request.