
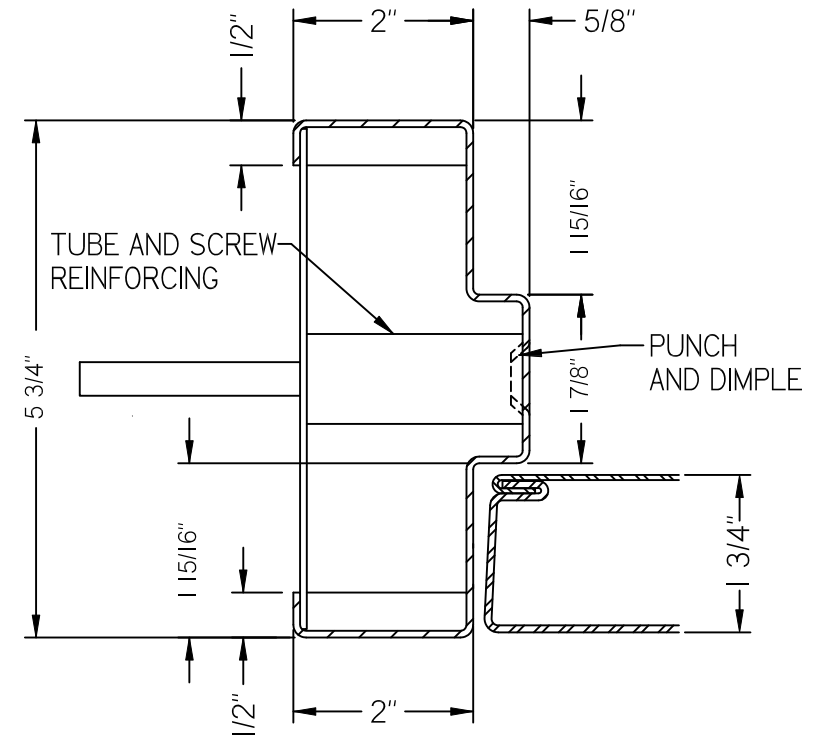
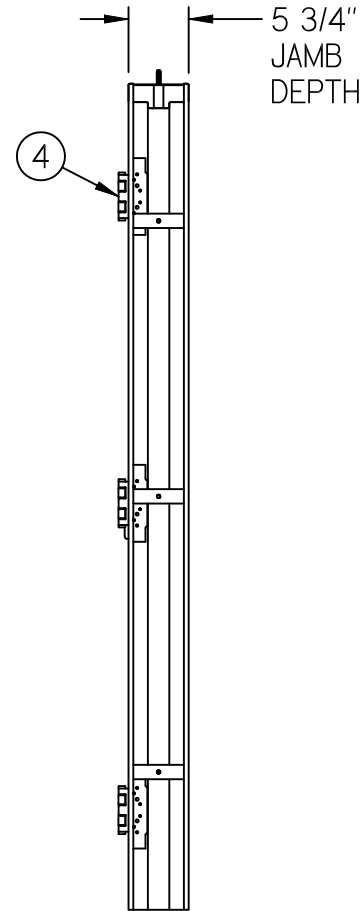


NOTES:




1. ARCHITECT AND/OR CONTRACTOR TO ENSURE WALL CAN RESIST APPLIED LOADING.
2. QUANTITY OF SCREWS OR CONCRETE ANCHORS AND THEIR LOCATION DEPENDS ON WALL CONSTRUCTION AND THUS ARE SUBJECT TO CHANGE

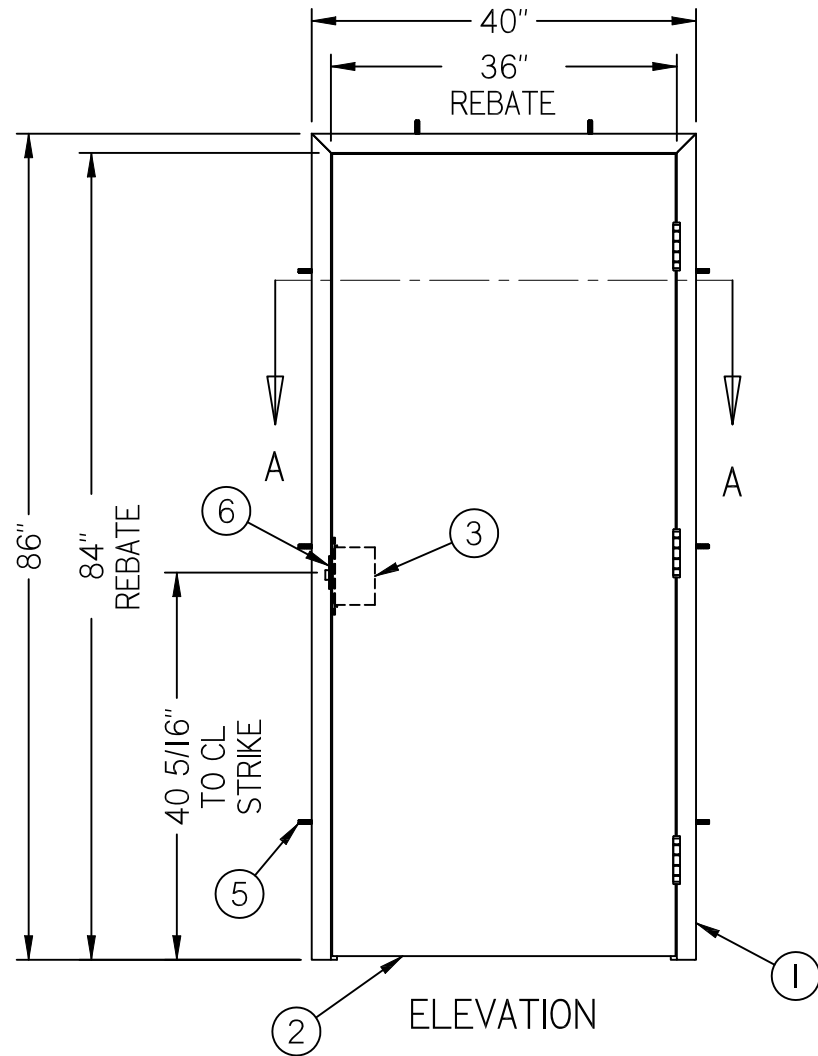

Item No.	Title
1	100psf Frame
2	100psf Door
3	Mortise Lock or Exit Device
4	4 1/2" x 4 1/2" Heavy Weight Hinge
5	Machine Screw or Concrete Anchor
6	Blast Reinforced Strike

NOTES:

1. ARCHITECT AND/OR CONTRACTOR TO ENSURE WALL CAN RESIST APPLIED LOADING.
2. QUANTITY OF SCREWS OR CONCRETE ANCHORS AND THEIR LOCATION DEPENDS ON WALL CONDITIONS AND THUS ARE SUBJECT TO CHANGE

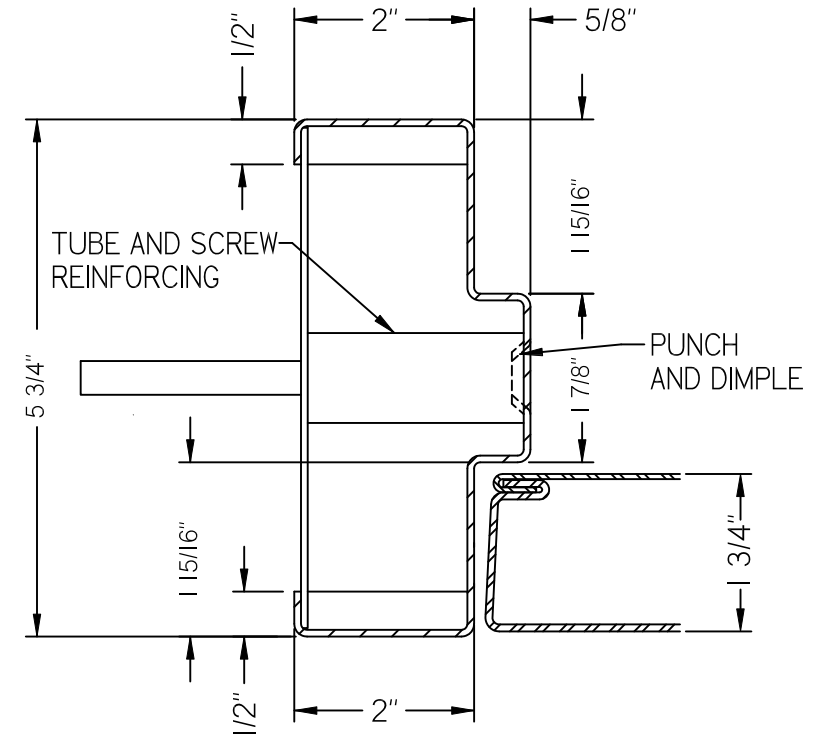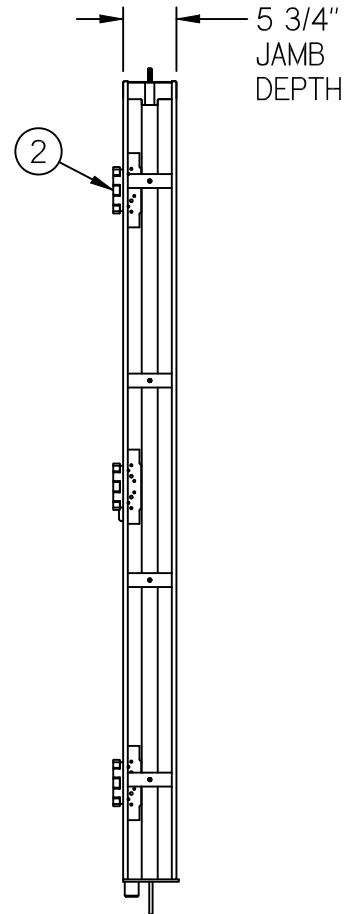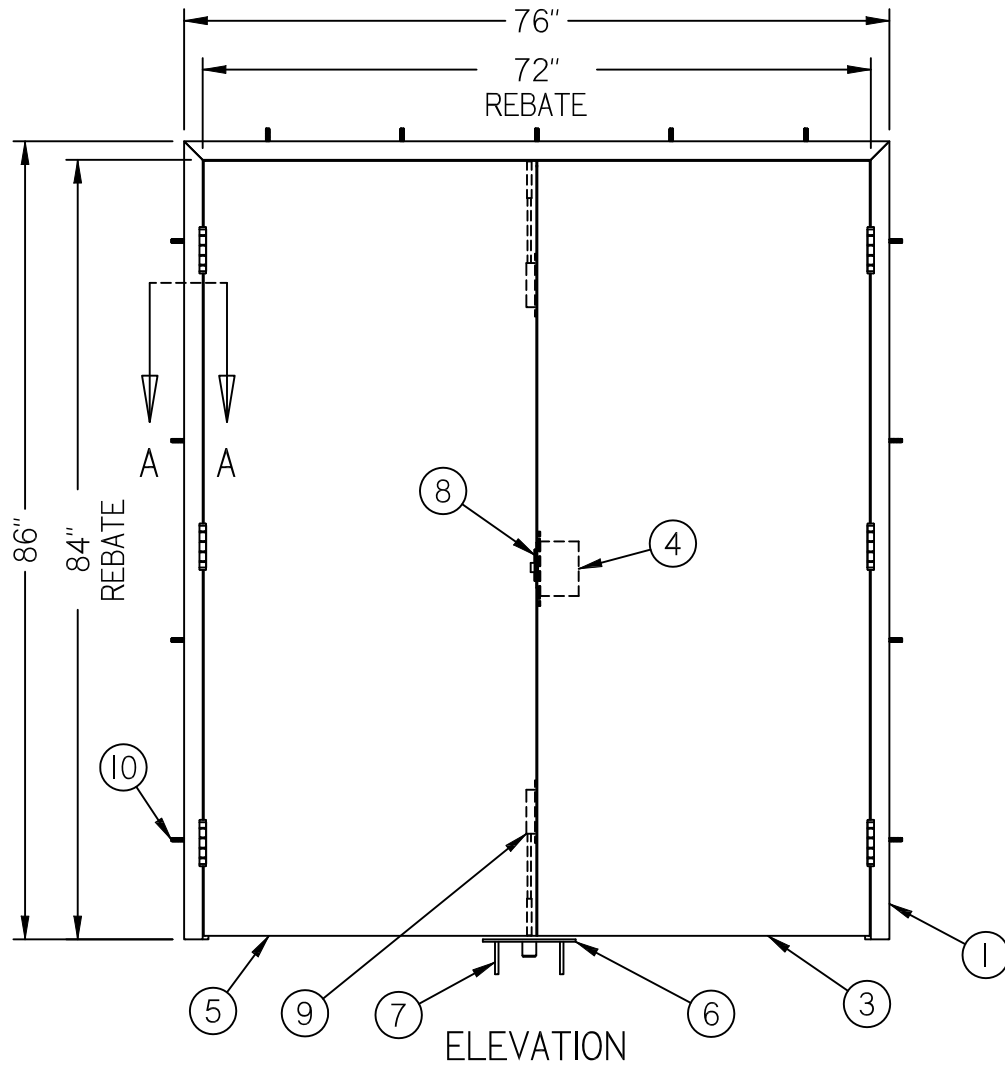

SECTION A-A

Item NO.	Title
1	100psf Frame - Pair
2	4 1/2" x 4 1/2" Heavy Weight Hinge
3	100psf Door - Active
4	Mortise Lock or Exit Device
5	100psf Door - Inactive
6	100psf Floor Plate
7	Flat Head Concrete Anchor
8	Blast-Reinforced Strike
9	Manual Flush Bolt
10	Machine Screw or Concrete Anchor