

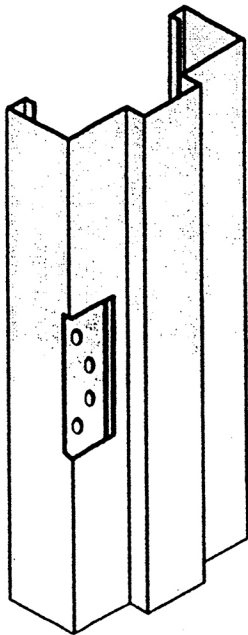
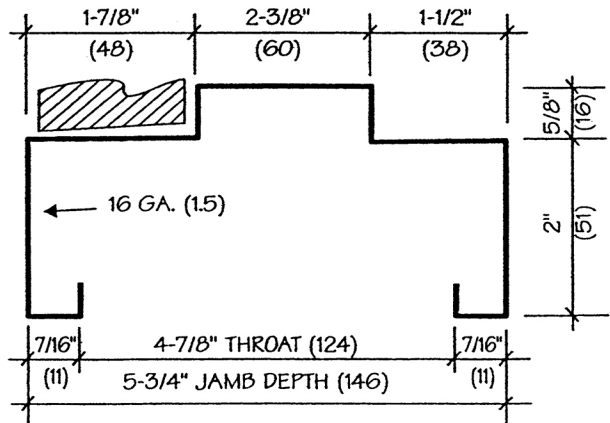



AS 5-3/4 STANDARD FRAMES

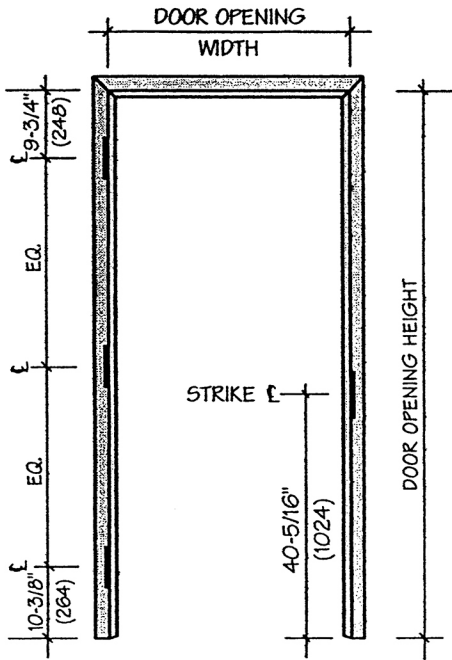

4-1/2" (114) HINGE  
PREPARATION—  
7 GA. (3.4) REINF.  
WITH DUST BOX

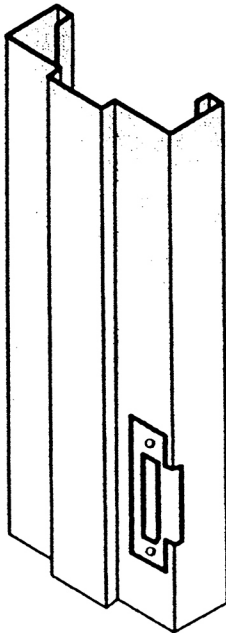

4-7/8" (124) STRIKE  
PREPARATION  
[ANSI A115.1]  
14 GA. (2.0) REINF.  
WITH DUST BOX.

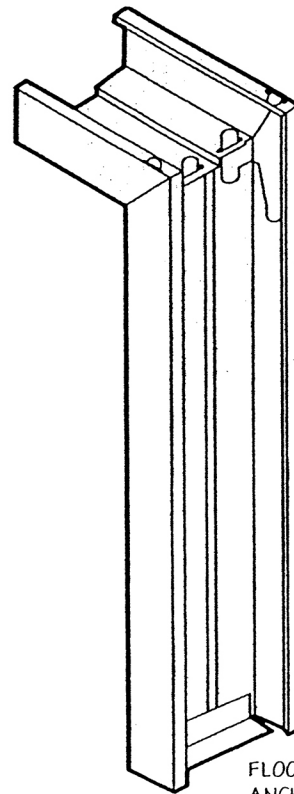

5-TAB  
K.D. CORNER

FLOOR FLANGE  
ANCHOR

PRINTED IN CANADA

PROJECT:

DATE:

SH: OF

LH

SWING KEY

RH