


**MULTIPLE-OPENING FIRE DOOR FRAMES**

**INFORMATION**

**TYPICAL SWING DIAGRAMS**

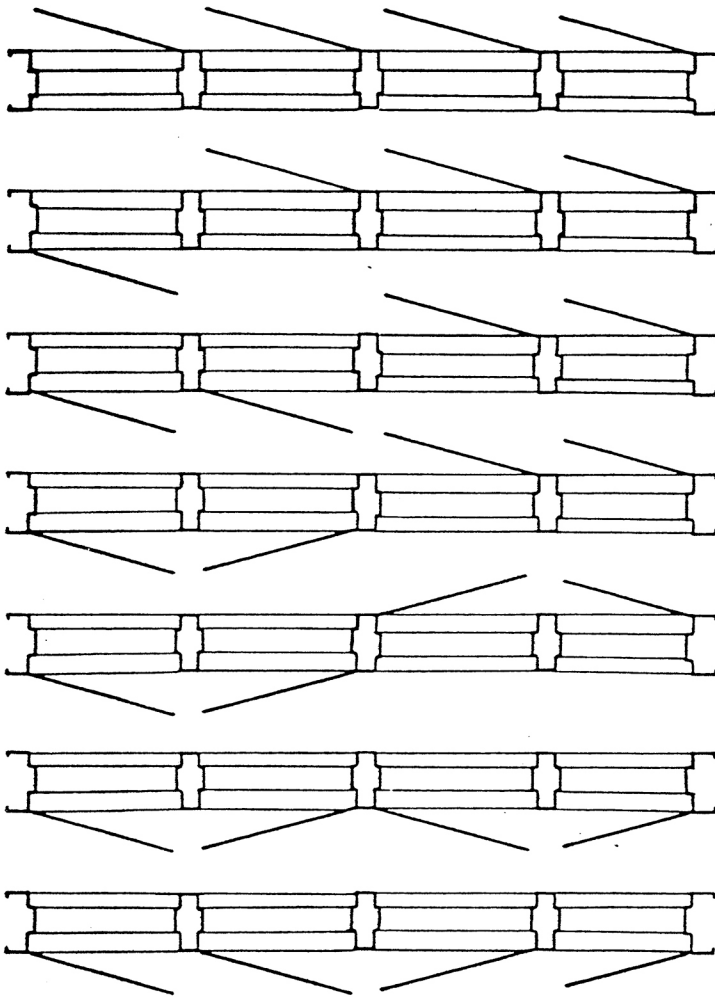

**SPECIFICATIONS**

1. Frames shall be 16 ga., welded construction. Anchors for installation in drywall shall be welded to jambs.
2. Frame may contain 2, 3 or 4 single doors. Pairs without strike mullion are not permitted.
3. Double hinge mullions and double egress hinge mullions shall be factory reinforced with welded steel angles.
4. Standard double strike mullions may be removeable; all other mullions shall be fixed. All mullions shall be plug-welded. Single-point latching (3/4" throw) is permitted on all doors.

LIMITATIONS	IMPERIAL	METRIC
Maximum overall size	12'-10" x 7'-4" *1	3912 x 2200 mm
Maximum door size	4'-0" x 7'-0" x 1-3/4"	1220 x 2150 x 45 mm
Minimum — Maximum jamb depth	5-3/4" — 12-1/4"	146 - 311 mm
Maximum fire rating	1-1/2 hour	1.5 h

Notes: \*1 — 4" head in masonry only.