

8600-MO/ME/VE-AF (5 PLY)

AGRIFIBRE CORE, FOR INTENSIVE USE

1 STILES: 1/8" (3 mm) hardwood or thick veneer, longitudinally laminated by hot pressing with type 1 structural glue, as per ASTM-D5456-93 (LVL FSC) or laminated strand lumber (LSL), including a 7/8" (22 mm) piece of hardwood, for a total width of 1 3/16" (30 mm).

MO: Manufacturer's choice.

ME: Matched with faces.

VE: Covered with 1/32" (0.7938 mm) of wood veneer, matched with faces.

2 TOP AND BOTTOM RAILS: 1 3/16" (30 mm) in wood or SCL, manufacturer's choice (LVL FSC) or (LSL).

3 CORE: Agrifibre (NAUF). **Neutral FSC.**

4 FACES: Wood veneer (choice of face veneers; 2 ply plywood), hardboard panel or plastic laminate glued to composite crossband. Available NAUF/FSC.

LOCK BLOCK: Integrated.

GLUE: Type 1 PVA Cross-link (NAUF).

INTERIOR USE

REFERENCE FPC-5/FPC-7 (AWI/AWMAC).

WARRANTY: LIFETIME

OPTIONS

| 20 minute fire rating, specify 8620-MO/ME/VE-AF.

| Wood veneer glued to plywood veneer (3 ply plywood) (7 ply door).

| * M.R. 5.1/5.2 according to project localisation. Contact us.

| ** To get M.R. 7.0, specify FSC faces.

| *** To get I.E.Q. 4.4, specify NAUF or NAUF/FSC faces.

NOTE

| Specify when M.R. 6.0 is required.


| Dimensions are nominal before trimming.




LEED ELIGIBLE CREDITS	4.1		4.2		M.R.		I.E.Q.	
	5.1	5.2	6.0	7.0	4.4 (NAUF)			
	*	*	✓	**	***			

Standards meet or exceed:
A.W.S. section 9, October 1, 2009;
W.D.M.A. 1.S.1A-04
and CSA 0132.2 90

1 STILES MO/ME

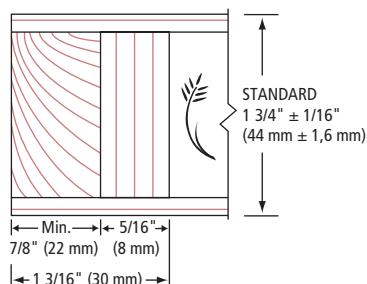

1 STILES VE

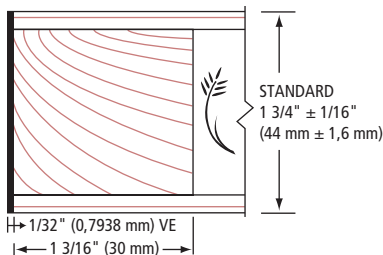

2 RAILS

