



TECHNICAL DATA
FROM
Anemostat[®]
DOOR PRODUCTS
A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD
CARSON, CA 90745-4206
(310) 835-7500 • FAX (310) 835-0448


e-mail: door@anemostat.com • website: www.anemostat.com

SG-12-LCP

SECURITY
VISION FRAME
WITH
LOCKING
CUFF PORT / FOOD PASS

NOT FIRE RATED

DETAIL DRAWING

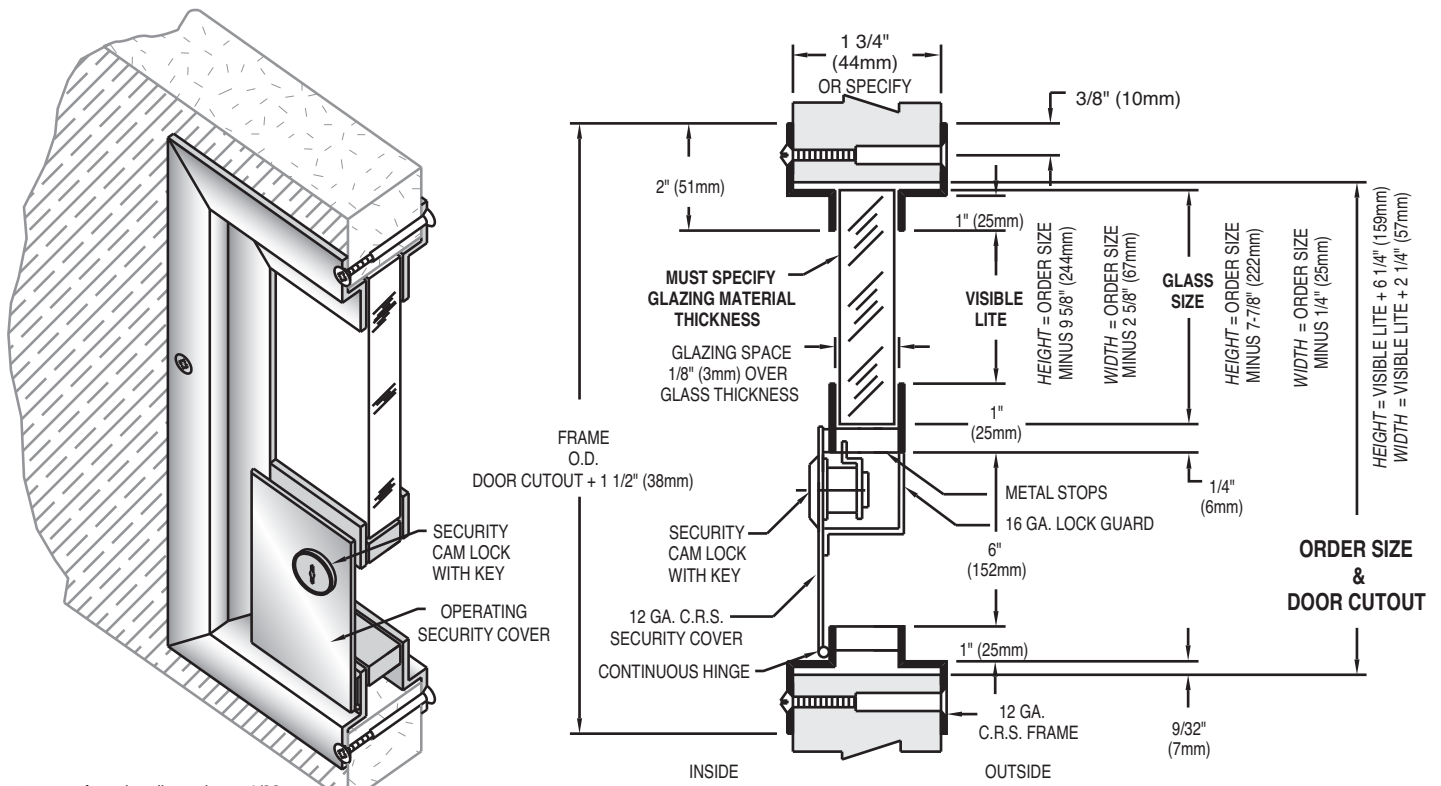

Anemostat manufacturing dimensions $\pm 1/32$
Actual dimensions are nominal and may vary
based on component manufacturers tolerances.

STANDARD PRODUCT FEATURES

- **MATERIAL:** 12 GA. Cold Rolled Steel Frame on glass 3/16" to 1 9/16" thick.
- **SECURITY COVER:** 16 GA. cold rolled steel plate with security keyed lock. Hinged to swing down for food pass or cuff port.
- **FINISH:** Grey Primer, Beige or Bronze Baked Enamel.
- **INSTALLATION:** By drilling 1/4" holes thru the door, around the perimeter of the door cutout. Frame has countersunk mounting holes for #8x32 one way vandal proof security screw thru bolts with a blank head on one side for flush appearance.
- **DOOR THICKNESS:** For 1 3/4" (std) or up to 2 1/4" (specify).
- **GLAZING:** Thickness can range from over 3/16" and up to 1 9/16". Glazing space of 1/8" over glass thickness is standard, allowing for glazing tape to be used on both sides of the glass.

OPTIONAL FEATURES

- **MATERIAL:** #304 or #316 Stainless Steel, #4 Finish (Satin), Galvanized (Hot Dipped, or Zinc Plated).
- **FINISH:** Special Order Baked Enamel Colors (as per sample chip supplied). Plated Finishes to match the lock, hinges and closer.
- **FASTENERS:** Special Security Screw Fasteners, See Page 26, this section.
- **SPECIALS:** Fractional Sizes, Glass thickness (3/16" to 1 9/16") and Door thickness (up to 2 1/4").

FIRE RATINGS

SG-12-LCP is not fire rated

- **IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.
- **NOTE:** For exterior use, High Humidity or Salt Air application, product must be Galvanized or Stainless Steel.

Job Name & Location	Submitted by