

SIMONSWERK TECTUS®

TE 240 3D

for unrebated and rebated flush residential doors

hinge up to 40 kg

Technical Details

Load capacity	40,0 kg
Length (door/frame)	155,0/155,0 mm
Width (door/frame)	18,0/21,0 mm
Cutter diameter	16,0 mm

Descriptive Text

SIMONSWERK TECTUS TE 240 3D Hinge. Completely concealed for unrebated and rebated flush doors with timber, steel and aluminium frames. Load capacity 40 kg, opening angle up to 180°, overall length 155 mm, right hand and left hand applicable, maintenance-free slide bearings, three-dimensionally adjustable: side +/- 3 mm, height +/- 3 mm, compression +/- 1,5 mm. Finish ...

Note


Finger protection due to a small gap between door and frame

Combination


Receiver	casing frame	TE 240 3D FZ/1
	steel frame	TE 240 3D SZ

Installation aids

universal milling frame	
Template No. 5 250691 6	frame
Template No. 5 250692 6	door



front view

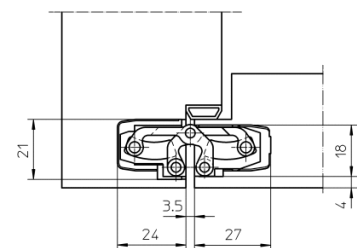

block frame

SIMONSWERK

TECTUS®


TE 240 3D

for unrebated and rebated flush residential doors


hinge up to 40 kg

Items (DIN direction: DIN right and left hand applicable)

finish(es)	polished brassed
Packing unit	Pack of 2
Item number	5 400586 0 03002
finish(es)	polished nickelled
Packing unit	Pack of 2
Item number	5 400586 0 03802
finish(es)	powder coated
Packing unit	EUR pallet
Item number	5 400586 0 07975
finish(es)	F1 powder coated
Packing unit	Pack of 2
Item number	5 400586 0 12402
finish(es)	F2 powder coated
Packing unit	Pack of 2
Item number	5 400586 0 12502
finish(es)	stainless steel look
Packing unit	Pack of 2
Item number	5 400586 0 12602

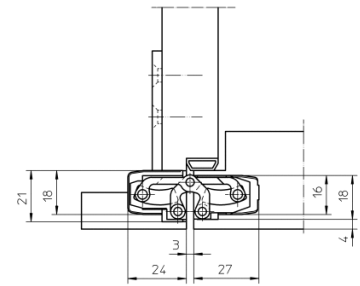

casing frame

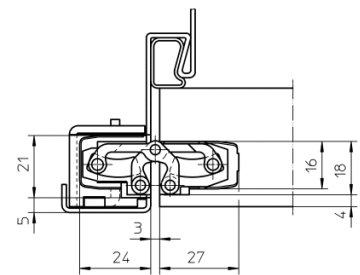

steel frame